Karona
DOORS OF DISTINCTION

PREFIT / PREMACHINE SCHEDULE

CUST PO	SPECIES	ORDER NO

FRAME OPENING SIZE	X	CUST PAGE	DOOR TYPE	PAGE	ITEM

PREFIT DOOR SIZE	X	X	EXIT DEVICE	STICKING TYPE	STRIKE TEMPLATE
			MFG NO & TRIM		
			TEMPLATE	PANEL TYPE	FLUSH BOLT TEMPLATE

HINGES

RADIUS ☐

SQUARE ☐

LENGTH

MANUFACTURER NUMBER

GAUGE

TEMPLATE

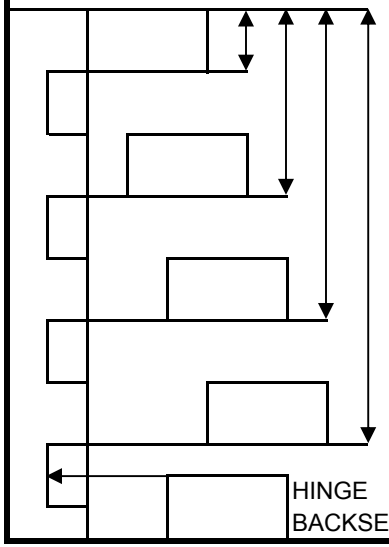

LOCK

MANUFACTURER NUMBER

TEMPLATE NO

TOP OF DOOR TO CENTER OF LOCK

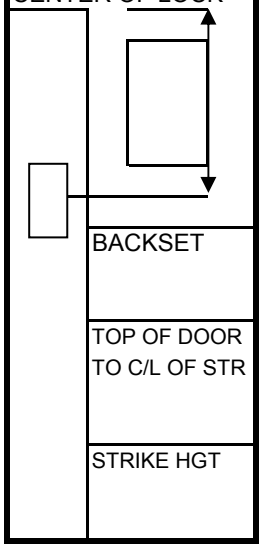

TOP OF DOOR TO CENTER OF:

	LOCK FRONT
	CYLINDER
	DEVICE
	BACKSET

BEVEL STILES

NONE	☐	HINGE	☐
BOTH	☐	LOCK	☐

Removable stop is inside unless noted

GLASS THICKNESS

1/8"	☐	1/2"	☐
1/4"	☐	5/8"	☐
OTHER			
OPEN	☐	GLAZE	☐

FIRE DOORS

20MIN NP SINGLE	☐
20MIN NP PAIRS	☐
20MIN PP	☐
45MIN PP	☐
60MIN PP	☐
90MIN PP	☐

MORTISE HOLDER/STOP - DEGREE OF OPG - TEMPLATE

OTHER HARDWARES/NOTES

DOOR NUMBERS	DOORS THIS PAGE	SWING

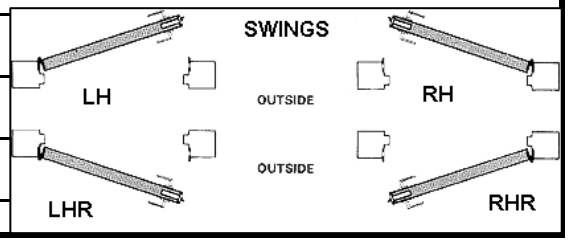

Locations must be filled in.